
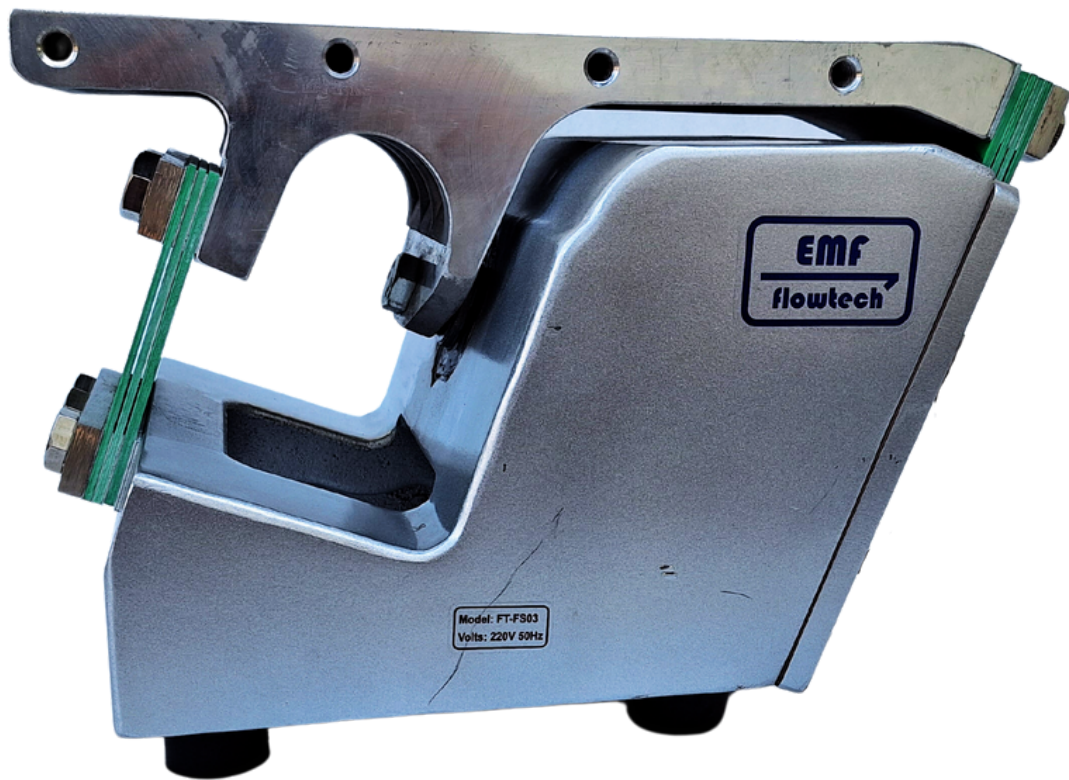


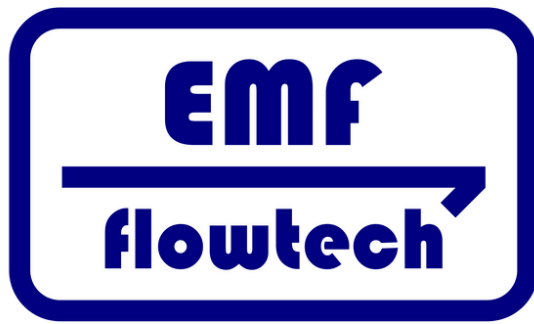

EMF FLOWTECH

FT-FS03

www.emfflowtech.co.za

TABLE OF CONTENTS

About Our FT-FS03 ----- 3

Technical Specifications ----- 4

Technical Drawing ----- 5

Images Of FT-FS03 ----- 6

Contact Us ----- 7

ABOUT OUR **FT-FS03**

The FT-FS03 is a versatile and high-performance electromagnetic vibratory feeder designed to meet the demands of various material handling applications. Equipped with a powerful 150W magnetic drive, this feeder ensures reliable and efficient high-capacity feeding. The stroke of 2.032mm enables precise control over material flow rates.





This model offers a delivery capacity of 0.1 up to 15 tons per hour (depending on material characteristics), making it suitable for applications requiring higher throughput. With a weight of 60kg and capable of handling a maximum trough weight of 30kg, the FT-FS03 combines durability and versatility, making it an excellent choice for industries such as food processing, minerals, agriculture, and chemical sectors.

TECHNICAL SPECIFICATIONS



FT-FS03



Voltage (V)	220 Volt
Power (W)	150 Watt
Frequency (Hz)	50 Hertz
Vibration per minute (V/min)	3000 V/min
Stroke in mm	2,03 Milimeter
Current (A)	3,0 - 6,0 Ampere
Typical delivery capacity (tons)	0,1 - 15 Tons per hour
Drive Weight (kg)	60 Kilogram
Max tray weight (kg)	30 Kilogram
Typical tray sizes	Width x Length
Long tray	250mm x 1200mm
Medium tray	450mm x 1100mm
Wide tray	750mm x 800mm

TECHNICAL DRAWING

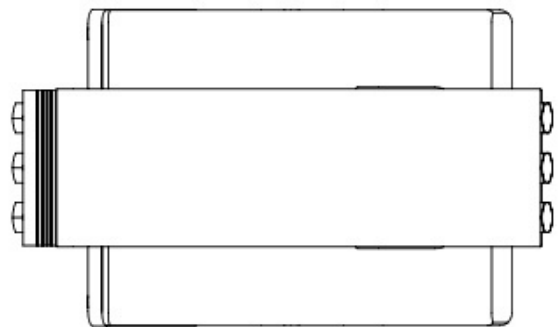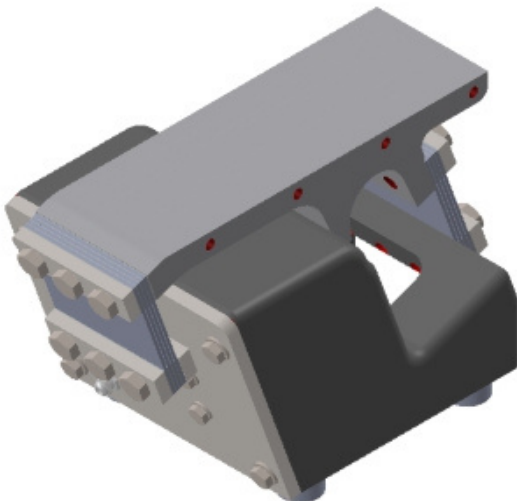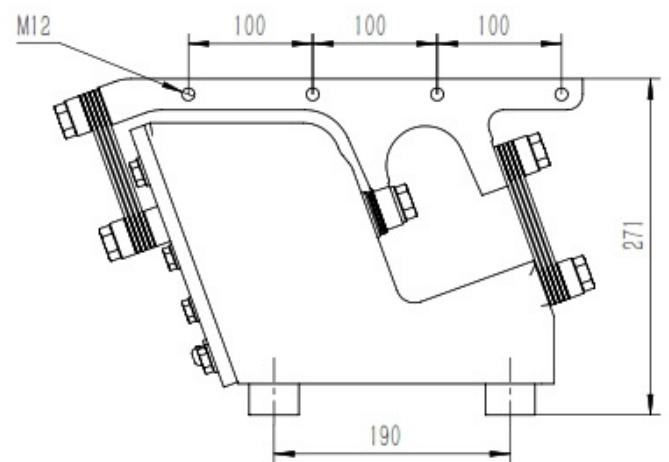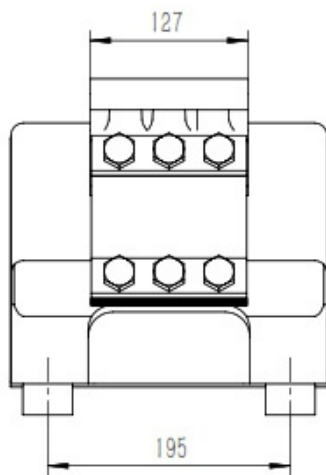

IMAGES OF FT-FS03

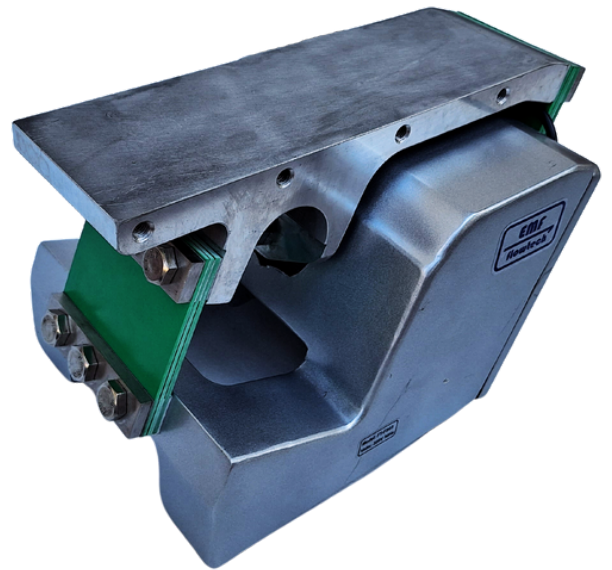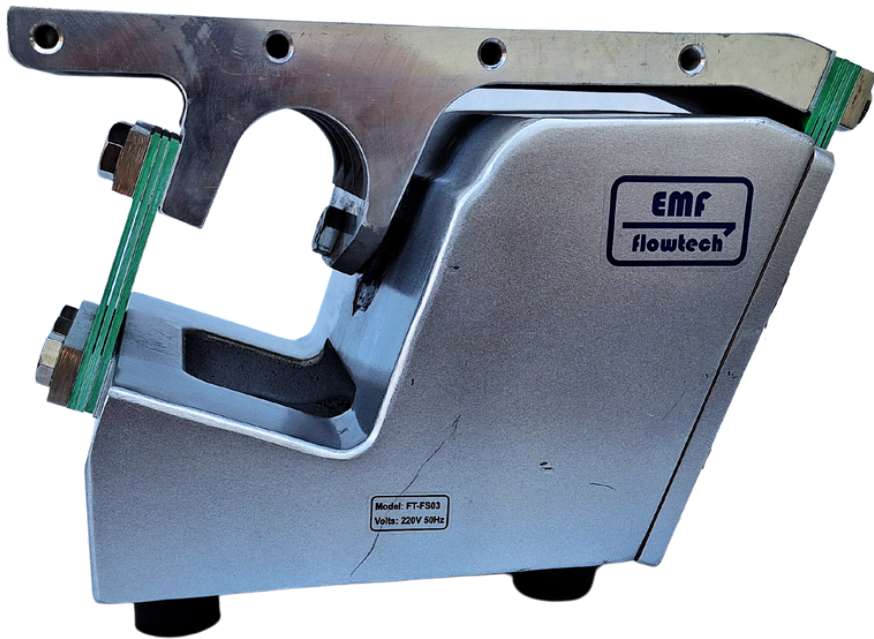

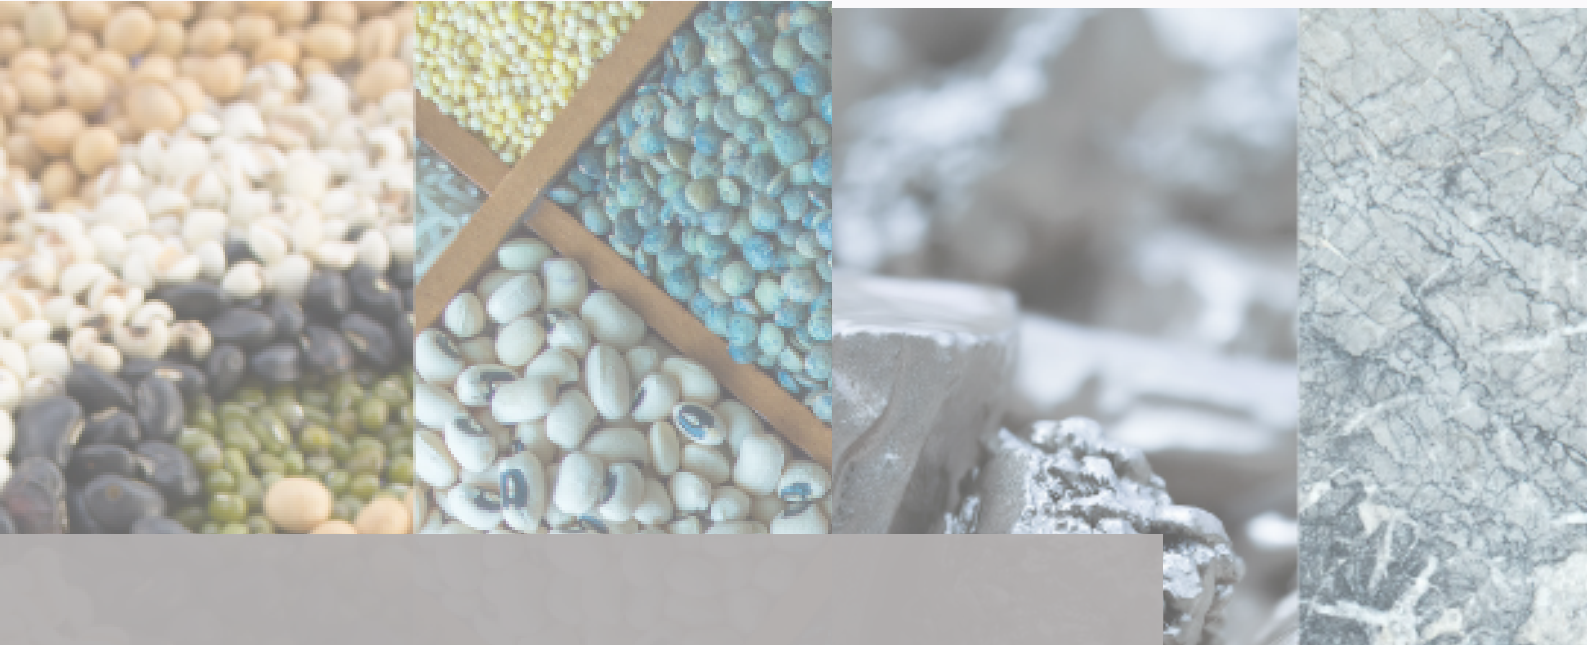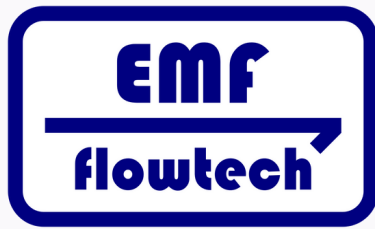

THANK YOU

Please feel free to contact us for any further questions regarding our products. We are happy to assist with any inquiry!



Address

Unit 7, Klein Oostersee Centre,
53 Friesland St, Oostersee, Cape Town, 7500,
South Africa



Telephone

+ 27 (0)21 591 8019



Website

www.emfflowtech.co.za

