
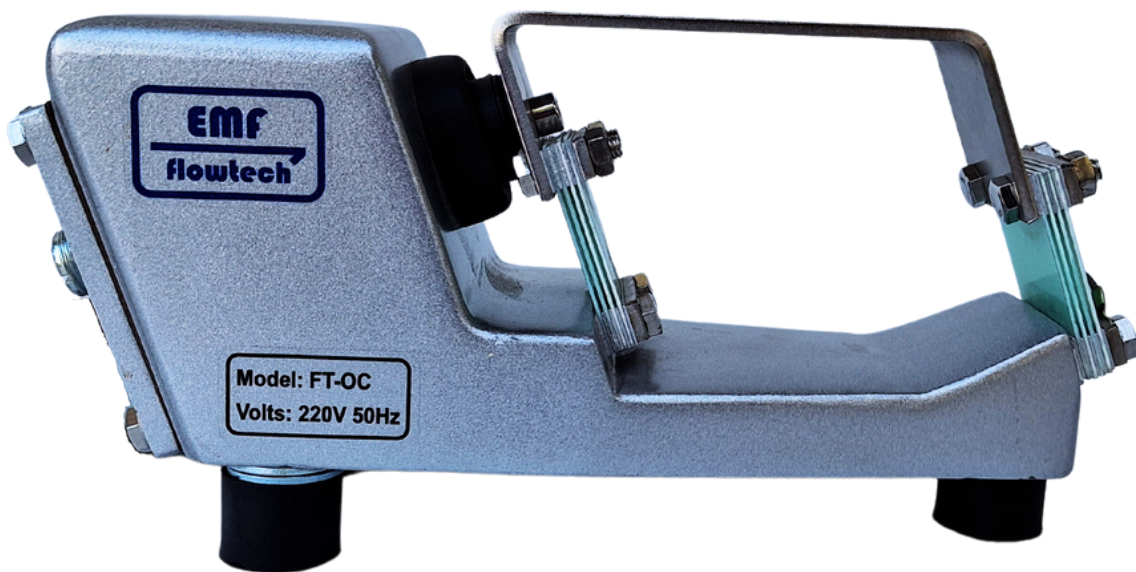


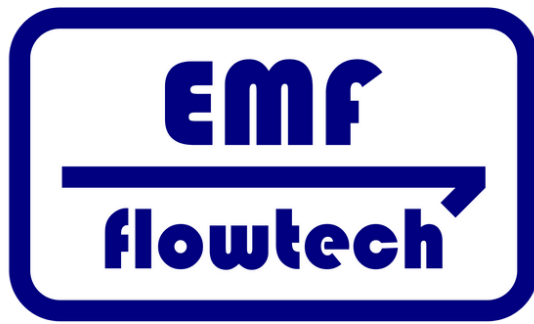

EMF FLOWTECH

FT-OC

www.emfflowtech.co.za

TABLE OF CONTENTS

About Our FT-OC ----- 3

Technical Specifications ----- 4

Technical Drawing ----- 5

Images Of FT-OC ----- 6

Contact Us ----- 7

ABOUT OUR FT-OC

The FT-OC, our smallest feeder drive, is a compact and reliable vibratory feeder designed to meet the material handling needs of various industries. It is typically used in weighing operations that require precise accuracy and control, offering consistent performance. All our feeders are supplied with a range of controller options for the local South African market to operate at 220 Volt 50 Hz power supply.




These feeders are successfully used in the food, minerals, ceramics, plastics, and chemical industries in a wide range of applications. The FT-OC's compact design and small stroke of 1.27mm make it ideal for laboratory, pharmaceutical, sampling operations, or any situation requiring accurate handling of small quantities of material.

TECHNICAL SPECIFICATIONS



FT-0C


Voltage (V)	220 Volt
Power (W)	20 Watt
Frequency (Hz)	50 Hertz
Vibration per minute (V/min)	3000 V/min
Stroke in mm	1,27 Milimeter
Current (A)	0,2 - 0,4 Ampere
Typical delivery capacity (tons)	0,1 - 1,2 Tons per hour
Drive Weight (kg)	4 Kilogram
Max tray weight (kg)	2 Kilogram
Typical tray sizes	Width x Length
Long tray	20mm x 400mm
Medium tray	50mm x 500mm
Wide tray	80mm x 300mm

TECHNICAL DRAWING

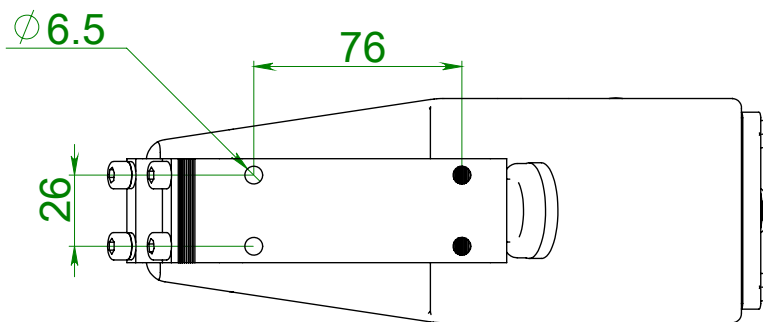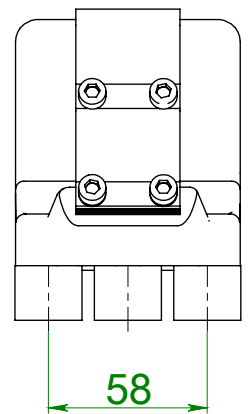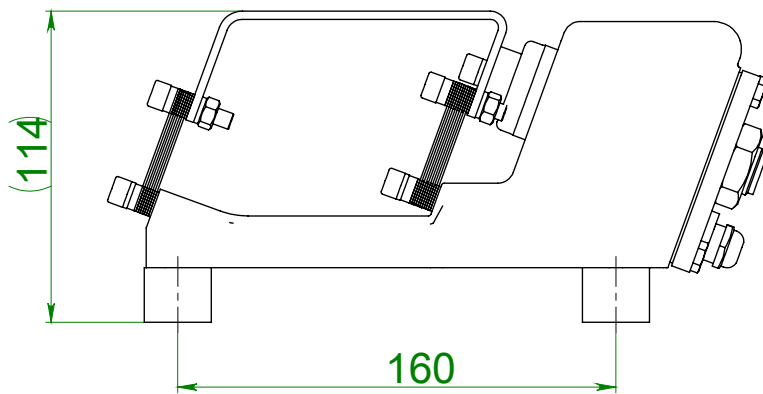

IMAGES OF FT-0C

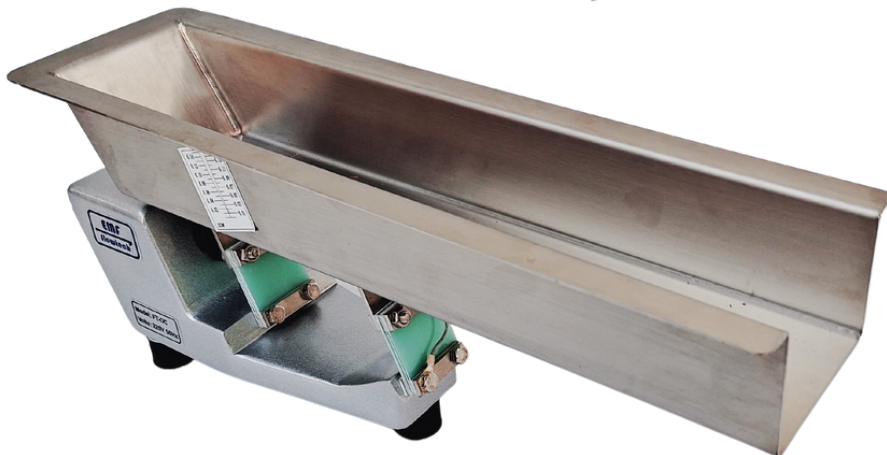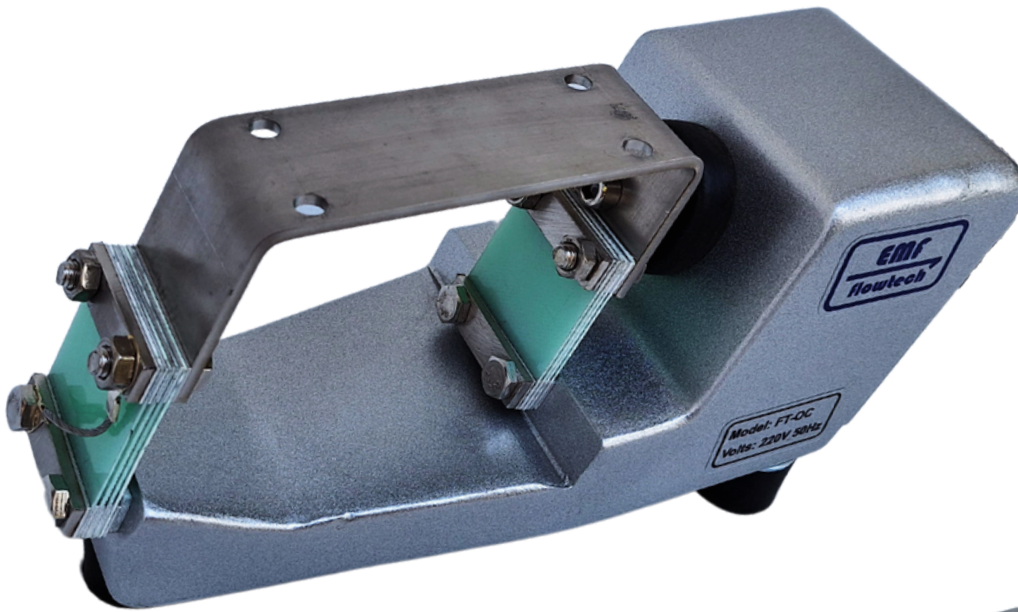

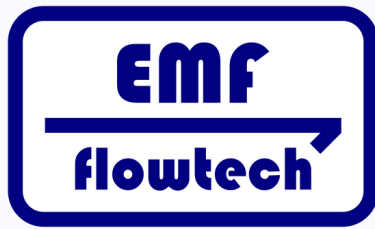

THANK YOU

Please feel free to contact us for any further questions regarding our products. We are happy to assist with any inquiry!



Address

Unit 7, Klein Oostersee Centre,
53 Friesland St, Oostersee, Cape Town, 7500,
South Africa



Telephone

+ 27 (0)21 591 8019



Website

www.emfflowtech.co.za